


JBC CTS

Solder Pot

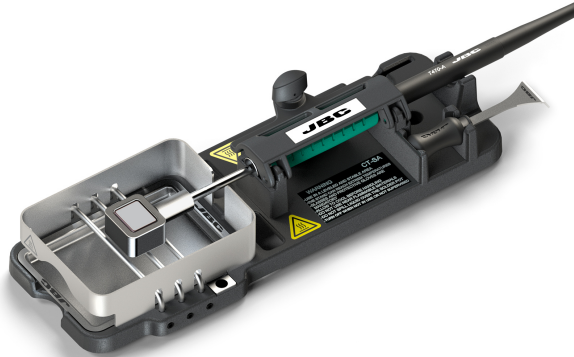

A robust and stable unit.

Residue tray: It is easily removeable for emptying and cleaning.

Protective Screen: It offers protection against accidents.

It can be employed with C470-SP01 Solder Pot Cartridge and with C470-SP42 Solder Pot Cartridge (for T470 handles) or C245-SP01 Solder Pot Cartridge (for T245 handles).

To save space when CTS is used, T245 and T470 Handles can be directly connected to HDE, DI, DDE and DME Control Units with CHB Converter.

Cartridges and handles are not included.

**Don't believe us...
TRY IT!**



REFERENCE

CT-SA

PRODUCT COMPOSITION

1 CTS Solder Pot Stand

SPECIFICATIONS

WEIGHT AND DIMENSIONS

Stand	245 x 92 x 48 mm / 1.00 kg. 9.65 x 3.62 x 1.89 in / 2.20 lb.
Package	342 x 155 x 120 mm / 1.31 kg. 13.46 x 6.10 x 4.72 in / 2.89 lb.

CONNECTABLES



HDE

Heavy Duty Soldering Station

Modular System



DI

1-Tool Control Unit



DDE

2-Tool Control Unit



DME

4-Tool Control Unit

Compatible tools



T245-A

General Purpose Handle



T245-PA

Blue Grip General Purpose Handle



T470-A

Heavy Duty Handle



T470-SA

Heavy Duty Handle with 3m cable



T470-ZA

Tri-lobed Grip HD Handle for better handling



T470-FA

Thermal Insulator Grip Heavy Duty Handle

Accessories



CHB-A

Converter